



Technical Report No.: 64.181.25.00679.01 Rev.00

Date: 2025-09-03

Client: Name: Guangdong JNOD New Energy Technology Co., Ltd.
 Address: 5th Building WISDOM CREATE WEALTH Industrial Park, Xingtan, Shunde 528325, Foshan, Guangdong, People's Republic of China
 Contact person: Mr. Huang Weiping

Manufacturer: Name: Guangdong JNOD New Energy Technology Co., Ltd.
 Address: 5th Building WISDOM CREATE WEALTH Industrial Park, Xingtan, Shunde 528325, Foshan, Guangdong, People's Republic of China

Factory: Name: Guangdong JNOD New Energy Technology Co., Ltd.
 Address: 5th Building WISDOM CREATE WEALTH Industrial Park, Xingtan, Shunde 528325, Foshan, Guangdong, People's Republic of China

Test object: Product: Air Source Heat Pump
 Model: JMU70HC, JMU70HC-B
 Trade mark: --

Test specification: EN 14825:2022
 EN 14511-3:2022
 EN 12102-1:2022
 EN 14511-4:2022 Clause 4

Purpose of examination: • Testing and evaluation (visual / partial) according to the test specification
 (EU) No 813/2013
 EU 2016/2282:2016-11-30

Test result: The test results show that the presented product is in compliance with the above listed test specifications.

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see Testing, Certification, Validation and Verification Regulations, chapter A-3.3.

Doc No.: ITC-TTW0902.02E – Rev.17

1 Description of the test object

1.1 Function

Manufacturer's specification for intended use:

The appliance is air to water heat pump.

Manufacturer's specification for predictive use:

According to user manual

1.2 Consideration of the foreseeable use

- Not applicable
- Covered through the applied standard
- Covered by the following comment
- Covered by attached risk analysis

1.3 Technical Data

Model :	JMU70HC, JMU70HC-B
Rated Voltage (V) :	220-240V~
Rated Frequency (Hz) :	50
Rated Power (W) :	see the nameplate
Rated Current (A) :	see the nameplate
Protection Class :	Class I
Protection Against Moisture :	IP X4
Construction :	Stationary
Supply connection :	<input type="checkbox"/> Non detachable cord <input checked="" type="checkbox"/> Permanent connection to fixed wiring
Operation mode:	<input checked="" type="checkbox"/> Continuous operation; <input type="checkbox"/> Intermittent operation; <input type="checkbox"/> Short time operation;
Refrigerant/charge (kg) :	R290 / 0.75kg
Declared parameters :	<input checked="" type="checkbox"/> Average <input type="checkbox"/> Warmer <input type="checkbox"/> Colder
Sound power level dB(A) :	N/A
Series No :	JMU70HC250430-001

2 Order

2.1 Date of Purchase Order, Customer's Reference

Date of Purchase Order: 2025-03-14

Customer's Reference: Guangdong JNOD New Energy Technology Co., Ltd.

2.2 Test Sample(s)

• Reception date(s): 2025-05-16

• Location(s) of reception:

For Energy and Noise test:

Guangzhou Customs District Technology Center
(CNAS accredited laboratory with Registration No.CNAS L2322)

Address: No.3, Desheng East Road, Daliang, Shunde District, Foshan, Guangdong, China

• Condition of test sample(s): completed and can be normal operation

2.3 Date(s) of Testing

2025-05-16 to 2025-06-04

2.4 Location(s) of Testing

Same as 2.2

2.5 Points of Non-compliance or Exceptions of the Test Procedure

N/A

3 Test Results

Decision rule according to ILAC-G8:09/2019 clause 4.2.1 Binary statement for simple acceptance rule or IEC Guide 115:2023, clause 4.3 Simple acceptance was applied.

Decision rule according to customer's requirements was applied. It is:

Decision rule according to ILAC-G8:09/2019 clause 4.2.2 Binary statement with guard band - guard band length = 95 % extended measurement uncertainty, was applied.

Decision rule (based on ILAC-G8:09/2019 clause 4.2.3 Non-binary statement with guard band, guard band length = 95 % extended measurement uncertainty) for an upper specification limit (A lower limit or specification with an up-per and a lower limit is treated similarly.):

• Compliance with the requirement: If a specification limit is not breached by a measurement result plus the expanded uncertainty with a 95% coverage probability, then compliance with the specification will be stated (e. g. Pass).

• Non-compliance with the requirement: If a specification limit is exceeded by the measurement result minus the expanded uncertainty with a 95% coverage probability, then non-compliance with the specification will be stated (e. g. Fail).

• Inconclusive result: If a measurement result plus/minus the expanded uncertainty with a 95 % coverage probability overlaps the limit it will be stated that it is not possible to state compliance or non-compliance.

There are no statements to conformity or no results with measurand stated in this report, no decision rule has been applied.

3.1 Positive Test Results

See Appendix I

4 Remarks

4.1 General

The user manual has been examined according to the minimum requirements described in the product standard. The manufacturer is responsible for the accuracy of further particulars as well as of the composition and layout.

4.2 When the product is placed on the market, it must be accompanied with safety Instructions written in official language of the country. The instructions shall give information regarding safe operation, installation and maintenance.

5 Documentation

- Appendix I: Test results
- Appendix II: Marking plate
- Appendix III: photo documentation
- Appendix IV: Construction data form
- Appendix V: Test equipment list

6 Test History

- 1) The appliance is Air to Water Heat Pump Unit, including a whole compression type refrigerant circuit to heat water in another circuit. The appliance was for cooling and heating water function, this report only for heating capacity test.
- 2) The main power is supplied by a 3-pole supply cord connecting to fixed wiring.
- 3) Water enthalpy method was adopted in this report.
- 4) Standby mode power, off mode power and thermostat-off mode power were tested according to clause 12 of standard EN 14825:2022.
- 5) The model JMU70HC is the same as the JMU70HC-B except for the model name and the exterior sheet metal appearance. All tests were carried out on the model JMU70HC.

Doc No.: ITC-TTW0902.02E – Rev.17

**TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch
TÜV SÜD Group**

Tested by: Yongxin Huang, Project Handler *Yongxin Huang*
printed name, function & signature

Approved by: Plum Li, Designated Reviewer *Plum Li*
printed name, function & signature



Appendix I Test results

Table 1.	Heating mode (Low temperature application):						P	
Model	JMU70HC							
Product type	Air to Water	Heating season	<input checked="" type="checkbox"/>	Average	<input type="checkbox"/>	Warmer	<input type="checkbox"/>	Colder
1. Test conditions:								
Condition	Part Load Ratio in %		Outdoor heat exchanger		Indoor heat exchanger			
	Formula	Average climates	Inlet dry (wet) bulb temperature (°C)		Inlet/outlet water temperatures (°C)			
A	$(-7-16)/(T_{designh-16})$	88	-7(-8)		a / 34			
B	$(+2-16)/(T_{designh-16})$	54	2(1)		a / 30			
C	$(+7-16)/(T_{designh-16})$	35	7(6)		a / 27			
D	$(+12-16)/(T_{designh-16})$	15	12(11)		a / 24			
E	$(TOL-16)/(T_{designh-16})$		TOL		a / 35.3			
F	$(T_{bivalent-16})/(T_{designh-16})$		T _{biv}		a / 34			
G	$(-15-16)/(T_{designh-16})$	N/A	-15		N/A			
Remark: a) With the water flow rate as determined at the standard rating conditions given in EN14511-2 at 30/35 conditions, the capacity is 7.029kW, the power is 1.570kW, the COP is 4.48kW/kW.								
2. Tested data/correction data(Average):								
General test conditions/ Part-Load	Unit	A(-7)/W34 (88%)	A2/W30 (54%)	A7/W27 (35%)	A12/W24 (15%)	A(-10)/ W35.3 (100%)	A(-7)/ W34 (88%)	
	--	A	B	C	D	E	F	
Data collection period	hh: min:sec	1:10:00	1:10:00	1:10:00	1:10:00	1:10:00	1:10:00	
The heat pump defrosts	--	No	No	No	No	No	No	
Electrical Properties								
Voltage	V	229.5	229.5	229.4	229.4	229.5	229.5	
Current input of the unit	A	10.11	4.31	2.18	1.95	9.89	10.11	
Power input of the unit	kW	2.294	0.885	0.397	0.348	2.243	2.294	
Compressor frequency	Hz	82	35	19	19	82	82	

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix I Test results

Test conditions User Side							
Water flow	m ³ /h	1.20	1.20	1.20	1.20	1.20	1.20
Inlet Water temperature	°C	29.45	27.16	25.24	23.23	31.12	29.45
Outlet Water temperature	°C	33.97	30.02	27.05	25.38	35.30	33.97
Test conditions Source Side							
Barometric pressure	kPa	101.02	101.01	101.01	101.02	101.01	101.02
Air inlet temperature, DB	°C	-7.03	2.00	7.01	12.00	-10.00	-7.03
Air inlet temperature, WB	°C	-7.99	1.01	6.03	11.00	-11.03	-7.99
Summary of the results							
Total heating capacity	kW	6.283	3.987	2.513	2.985	5.806	6.283
Effective power input	kW	2.264	0.858	0.370	0.319	2.213	2.264
Coefficient of performance (COP)	kW/kW	2.77	4.65	6.80	9.35	2.62	2.77
Remark: -							

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.006
Standby mode [P _{SB}]	kW	0.006
Crankcase heater [P _{CK}]	kW	0.035
Off mode [P _{OFF}]	kW	0.006

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix I Test results

3.Calculation/conclusion for SCOP:						
Tdesignh(°C):	-10	Tbiv(°C) :	-7			
Pdesignh(kW):	7.103	TOL(°C) :	-10			
Test result A, B, C, D, E, F conditions:						
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load
E	7.103	5.806	2.62	0.90	1.00	2.62
F	6.283	6.283	2.77	0.90	1.00	2.77
A	6.283	6.283	2.77	0.90	1.00	2.77
B	3.825	3.987	4.65	0.90	0.96	4.65
C	2.459	2.513	6.80	0.90	0.98	6.80
D	1.093	2.985	9.35	0.90	0.37	7.97
CR: part load divided by capacity;						

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	4.80
SCOP:	kWh/kWh	4.79
Q _H :	kWh/year	14675
Q _{HE} :	kWh/year	3062
η _{s,h}	%	188.7
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 2)	--	A+++

Appendix I Test results

Table 2.	Heating mode (Medium temperature application):						P	
Model	JMU70HC							
Product type	Air to Water	Heating season	<input checked="" type="checkbox"/>	Average	<input type="checkbox"/>	Warmer	<input type="checkbox"/>	Colder
1. Test conditions:								
Condition	Part Load Ratio in %		Outdoor heat exchanger		Indoor heat exchanger			
	Formula	Average climates	Inlet dry (wet) bulb temperature (°C)		Inlet/outlet water temperatures (°C)			
A	$(-7-16)/(T_{designh-16})$	88	-7(-8)		a / 52			
B	$(+2-16)/(T_{designh-16})$	54	2(1)		a / 42			
C	$(+7-16)/(T_{designh-16})$	35	7(6)		a / 36			
D	$(+12-16)/(T_{designh-16})$	15	12(11)		a / 30			
E	$(TOL-16)/(T_{designh-16})$		TOL		a / 55.3			
F	$(T_{bivalent-16})/(T_{designh-16})$		T _{biv}		a / 52			
G	$(-15-16)/(T_{designh-16})$	N/A	-15		N/A			
Remark: a) With the water flow rate as determined at the standard rating conditions given in EN14511-2 at 47/55 conditions, the capacity is 6.893kW, the power is 2.438kW, the COP is 2.83kW/kW.								
2. Tested data/correction data(Average):								
General test conditions/ Part-Load	Unit	A(-7)/W52 (88%)	A2/W42 (54%)	A7/W36 (35%)	A12/W30 (15%)	A(-10)/ W55.3 (100%)	A(-7)/ W52 (88%)	
	--	A	B	C	D	E	F	
Data collection period	hh: min:sec	1:10:00	1:10:00	1:10:00	1:10:00	1:10:00	1:10:00	
The heat pump defrosts	--	No	No	No	No	No	No	
Electrical Properties								
Voltage	V	228.3	230.0	229.4	229.4	229.5	228.3	
Current input of the unit	A	11.42	4.36	2.45	2.23	11.82	11.42	
Power input of the unit	kW	2.595	0.929	0.433	0.411	2.698	2.595	
Compressor frequency	Hz	77	34	17	18	79	77	

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix I Test results

Test conditions User Side							
Water flow	m³/h	0.75	0.75	0.75	0.75	0.75	0.75
Inlet Water temperature	°C	45.81	38.30	33.46	28.84	49.55	45.81
Outlet Water temperature	°C	51.94	42.08	35.88	31.98	55.26	51.94
Test conditions Source Side							
Barometric pressure	kPa	99.85	99.85	99.85	99.80	99.75	99.85
Air inlet temperature, DB	°C	-7.00	2.01	7.08	12.01	-10.00	-7.00
Air inlet temperature, WB	°C	-8.01	1.00	6.08	11.01	-11.04	-8.01
Summary of the results							
Total heating capacity	kW	5.338	3.288	2.101	2.733	4.965	5.338
Effective power input	kW	2.584	0.918	0.421	0.400	2.669	2.584
Coefficient of performance (COP)	kW/kW	2.07	3.58	4.99	6.84	1.86	2.07
Remark: -							

Electric power consumptions	Unit	Value
Thermostat-off mode [P _{TO}]	kW	0.006
Standby mode [P _{SB}]	kW	0.006
Crankcase heater [P _{CK}]	kW	0.035
Off mode [P _{OFF}]	kW	0.006

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix I Test results

3.Calculation/conclusion for SCOP:						
Tdesignh(°C):	-10	Tbiv(°C) :	-7			
Pdesignh(kW):	6.034	TOL(°C) :	-10			
Test result A, B, C, D, E, F conditions:						
Condition	Part load	Measured capacity	Measured COP	Cdh	CR	COP at part load
E	6.034	4.965	1.86	0.90	1.00	1.86
F	5.338	5.338	2.07	0.90	1.00	2.07
A	5.338	5.338	2.07	0.90	1.00	2.07
B	3.249	3.288	3.58	0.90	0.99	3.58
C	2.089	2.101	4.99	0.90	0.99	4.99
D	0.928	2.733	6.84	0.90	0.34	5.73
CR: part load divided by capacity;						

Conclusions:	Unit	Value
SCOPon:	kWh/kWh	3.63
SCOP:	kWh/kWh	3.62
Q _H :	kWh/year	12466
Q _{HE} :	kWh/year	3445
η _{s,h}	%	141.7
Seasonal space heating energy efficiency classes: (According (EU) No 811/2013 Table 1)	--	A++

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix I Test results

Table 3a.	Sound power level measurement (Low temperature application)		P
Model	JMU70HC		
	Product type :	Air to Water	
	Outdoor heat exchanger, Air temperature DB/WB (°C):	7.0 / 6.0	
	Indoor heat exchanger, Water outlet temperature (°C):	35.0	
	Voltage (V):	230	
	Frequency (Hz):	50	
	Working condition class :	Class A	
	Acoustical environment :	Hemi-anechoic room	
	Windshield type :	Sponge	
	Measured position amount :	9	
Measured quantity	L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark
Sound pressure level ` L _{p(ST)} ****	--	37	--
Measurement distance d *	--	1.0m	--
Sound power level L _{WA} ****	--	52	--
Setting of controls: according to user manual.			
Duct connection:--			
Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer			

Appendix I Test results

Table 3b.	Sound power level measurement (Medium temperature application)		P
Model	JMU70HC		
	Product type :	Air to Water	
	Outdoor heat exchanger, Air temperature DB/WB (°C):	7.0 / 6.0	
	Indoor heat exchanger, Water outlet temperature (°C):	55.0	
	Voltage (V):	230	
	Frequency (Hz):	50	
	Working condition class :	Class A	
	Acoustical environment :	Hemi-anechoic room	
	Windshield type :	Sponge	
	Measured position amount :	9	
Measured quantity	L _{WA,indoors} (dB(A))	L _{WA,outdoors} (dB(A))	Remark
Sound pressure level $\hat{L}_{p(ST)}$ ****	--	40	--
Measurement distance d *	--	1.0m	--
Sound power level L _{WA} ****	--	55	--
Setting of controls: according to user manual.			
Duct connection:--			
Rounding to: *) 1 decimal places; **) 2 decimal places; ***) 3 decimal places; ****) nearest integer			

Appendix I Test results

Table 4.	Clause 4 of EN 14511-4:2022	P
Model:	JMU70HC	
TEST 1	STARTING TEST (§4.2.1.2 Table 3)	
Requirement: The "lower" starting operating conditions declared by the manufacturer for the heating mode- i.e. T _{air} = -25.01°C, T in water = 20.01°C, Flow rate 0.60m ³ /h have been set and obtained. At those conditions, the machine was switched on.		
Observation/ Evaluation: It started without any problem and worked for 30 minutes without showing any warning or alarm. During the test the machine operated in auto mode. No damage was recorded on the machine during and after the test.		
Test Response: Pass		

TEST 2	OPERATING TEST (§4.2.1.2 Table 3)	
Requirement: From the machine "lower" starting conditions - i.e. - the machine was brought to the lower operating conditions declared by the manufacturer for the heating mode- i.e. T _{air} = -24.93 °C, T in water = 67.50 °C, Flow rate 0.60 m ³ /h. Once these conditions were obtained, the machine was let operate for over 1 hour in auto mode.		
Observation/ Evaluation: During the test, no warning or alarm were showed. No damage was recorded on the machine during and after the test.		
Test Response: Pass		

TEST 3	SHUTTING OFF WATER FLOW (§ 4.5)	
Requirement: The water flow rate was shutted off through manual and automatic valves of the test rig. The machine switched off and only the flow switch Protection appeared on the user interface of indoor unit.		
Observation/ Evaluation: Perform error reset operation, once the water flow rate was restored, the machine restarted automatically and worked for 30 minutes normally. No damage was recorded on the machine during and after the test.		
Test Response: Pass		

TEST 4	SHUTTING OFF AIR FLOW (§ 4.5)	
Requirement: The air flow rate was shutted off through a plastic sheet and a panel. The machine never turned off. It continued to operate with continuous frosting and defrosting cycles. After more than half an hour, the air flow rate was restored and the machine started to operate normally.		
Observation/ Evaluation: During the test, no warning or alarm were showed. No damage was recorded on the machine during and after the test.		
Test Response: Pass		

TEST 5	COMPLETE POWER SUPPLY FAILURE (§ 4.6)	
Requirement: The power supply was cut off for about 5 seconds.		
Observation/ Evaluation: The unit restarted automatically within about 3 minutes after the power supply was reactivated.		
Test Response: Pass		

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix II Marking plate

Nameplate			
Air Source Heat Pump		CE 	
Model	JMU70HC		
Power Supply	220-240V~ 50Hz		
Heating ¹	Capacity	3000~7050W	
	Power input	500~1500W	
	Current input	2.17~6.52A	
Heating ²	Capacity	3000~7070W	
	Power input	700~2280W	
	Current input	3.04~9.91A	
Cooling	Capacity	2500~5600W	
	Power input	700~2000W	
	Current input	3.04~8.69A	
Max power input	4140W		
Max current input	18A		
Circuit breaker	25A		
Max COP heating	4.7W/W		
Max.Outlet water temp	75°C		
Operation ambient temp	-25~43°C		
Refrigerant type/change	R290/750g		
CO ₂ equivalent(GWP)	0.00225t		
Operation pressure(High/Low side)	3.0Mpa/0.85Mpa		
Max.allowable pressure	3.0Mpa		
Anti-electric shock class	Class I		
Degree of protection	IPX4		
Rated water flow	20L/Min(1.2m ³ /h)		
Water piping connections	G1'		
Water pressure drop	15kPa		
Net dimensions(LxWxH)	700×675×910mm		
Rated test conditions: Heating ¹ :ambient temp.7°C/6°C(DB/WB).Water-in/out temp.30°C/35°C Heating ² :ambient temp.7°C/6°C(DB/WB).Water-in/out temp.47°C/55°C Cooling:ambient temp.35°C/24°C(DB/WB).Water-in/out temp.12°C/7°C Guangdong JNOD New Energy Technology Co., LTD. note.for outdoor use only.installation&service by licensed mechanic only.			
Air Source Heat Pump		CE 	
Model	JMU70HC-B		
Power Supply	220-240V~ 50Hz		
Heating ¹	Capacity	3000~7050W	
	Power input	500~1500W	
	Current input	2.17~6.52A	
Heating ²	Capacity	3000~7070W	
	Power input	700~2280W	
	Current input	3.04~9.91A	
Cooling	Capacity	2500~5600W	
	Power input	700~2000W	
	Current input	3.04~8.69A	
Max power input	4140W		
Max current input	18A		
Circuit breaker	25A		
Max COP heating	4.7W/W		
Max.Outlet water temp	75°C		
Operation ambient temp	-25~43°C		
Refrigerant type/change	R290/750g		
CO ₂ equivalent(GWP)	0.00225t		
Operation pressure(High/Low side)	3.0Mpa/0.85Mpa		
Max.allowable pressure	3.0Mpa		
Anti-electric shock class	Class I		
Degree of protection	IPX4		
Rated water flow	20L/Min(1.2m ³ /h)		
Water piping connections	G1'		
Water pressure drop	15kPa		
Net dimensions(LxWxH)	700×675×910mm		
Rated test conditions: Heating ¹ :ambient temp.7°C/6°C(DB/WB).Water-in/out temp.30°C/35°C Heating ² :ambient temp.7°C/6°C(DB/WB).Water-in/out temp.47°C/55°C Cooling:ambient temp.35°C/24°C(DB/WB).Water-in/out temp.12°C/7°C Guangdong JNOD New Energy Technology Co., LTD. note.for outdoor use only.installation&service by licensed mechanic only.			

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix III photo documentation

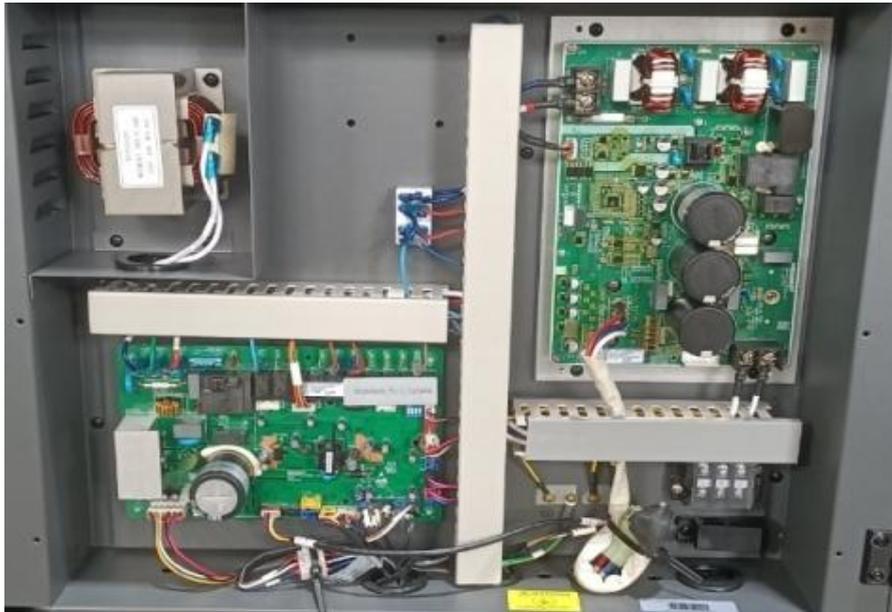
Details of:	Overall view for JMU70HC
<p>View:</p> <p><input type="checkbox"/> General</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right</p> <p><input type="checkbox"/> Left</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p>	

Details of:	Compressor
<p>View:</p> <p><input type="checkbox"/> General</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right</p> <p><input type="checkbox"/> Left</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p>	

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix III photo documentation

Details of:	Fan Motor
View:	
<input type="checkbox"/> General	
<input type="checkbox"/> Front	
<input type="checkbox"/> Rear	
<input type="checkbox"/> Right	
<input type="checkbox"/> Left	
<input type="checkbox"/> Top	
<input type="checkbox"/> Bottom	

Details of:	Main Control Board
View:	
<input type="checkbox"/> General	
<input type="checkbox"/> Front	
<input type="checkbox"/> Rear	
<input type="checkbox"/> Right	
<input type="checkbox"/> Left	
<input type="checkbox"/> Top	
<input type="checkbox"/> Bottom	

Doc No.: ITC-TTW0902.02E - Rev.17

Appendix III photo documentation

Details of:	Water Pump															
<p>View:</p> <p><input type="checkbox"/> General</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right</p> <p><input type="checkbox"/> Left</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p>	 <table border="1"> <thead> <tr> <th></th> <th>I(A)</th> <th>P,(W)</th> <th>MPa</th> <th>H(m)</th> </tr> </thead> <tbody> <tr> <td>Min.</td> <td>0.1</td> <td>5</td> <td>-</td> <td>0.7</td> </tr> <tr> <td>Max.</td> <td>0.42</td> <td>45</td> <td>1.0</td> <td>6</td> </tr> </tbody> </table> <p>CE </p> <p>EEI≤0.20</p> <p>MADE IN CHINA</p> <p>Address: Ruisheng Road 1#, Economical development Zone, Shuyang City, Jiangsu Province, China</p> <p>SHIMGE PUMP INDUSTRY (JIANGSU) CO., LTD.</p>		I(A)	P,(W)	MPa	H(m)	Min.	0.1	5	-	0.7	Max.	0.42	45	1.0	6
	I(A)	P,(W)	MPa	H(m)												
Min.	0.1	5	-	0.7												
Max.	0.42	45	1.0	6												

Details of:	Overall view for JMU70HC-B
<p>View:</p> <p><input type="checkbox"/> General</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right</p> <p><input type="checkbox"/> Left</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p>	

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix IV Construction data form

Part		Technical data
1. Compressor		
	Manufacture:	SAHNGHAI HIGHLY ELECTRICAL APPLIANCES CO.,LTD.
	Type:	WHP10200PSDPC9KQ
	Serial-number:	W7XN5H0CL9SP
	Specification:	DC143.5V; R290
2. Condenser		
	Manufacture:	Danfoss.,LTD.
	Type:	H39L-EZU-36
	Heat exchanger:	Plate heat exchanger
	Dimension(mm):	117×49×331 mm
3. Evaporator		
	Manufacture:	Guangdong Sparkle Air-conditioning Equipment Co.,Ltd.
	Type:	/
	Heat exchanger:	Finned heat exchanger
	Dimension(mm):	670×470×750 mm
4. Fan motor		
	Manufacture:	Jiangmen LT Motor Co.,Ltd.
	Type:	RD85HA
	Fan type:	3 blade
	Specification:	DC310V; 85W
5. Main control board		
	Manufacture:	ShenZhen Megmeet Electrical Co.,Ltd.
	Type:	HiPlus12000-VZM
	Specification:	220-240V~; 50/60Hz
6. Water pump		
	Manufacture:	SHIMGE PUMP INDUSTRY(JIANGSU)CO.,LTD.
	Type:	APE20-6-130S FPWM1
	Specification:	230V~; 50/60Hz

Doc No.: ITC-TTW0902.02E – Rev.17

Appendix V Equipment List

No.	Type	Manufacture	Model	Equipment ID	Calibration Due Date
1	Heat pump energy efficiency testing system	/	10HP	2017JO0001	2025-11-07
2	Electromagnetic flowmeter	KROHNE	OPTIFLUX4100C	H17221264	2025-11-07
3	Noise Meter and PULSE Sound Power	B&K / Brüel & Kjær Sound & Vibration Measurement A/S.	3560-B-010 PULSE	202444CK0032-3	2026-06-26
4	Power Analyzer	HIOKI/ HIOKI E.E. CORPORATION	3334	200844CK0084	2026-06-26
5	Atmospheric Pressure Meter	FENGYANG/TIAN JIN FENGYANG INSTRUMENT INDUSTRIAL AND TRADING CO. LTD	DYM3	200944BK0273	2025-11-11
6	1/2" Free-field Microphone	B&K / Brüel & Kjær Sound & Vibration Measurement A/S.	4190-L-001	202444CK0032-4 202444CK0032-5 202444CK0032-6 202444CK0032-7 202444CK0032-8 202444CK0032-9 202444CK0032-10 202444CK0032-11 202444CK0032-12	2026-06-26
7	Hygrometer	UNI-T	UT332	201444CK0004SD	2025-11-10
8	Tape Measure	0-3000mm	3m	201444CK0026SD	2025-11-21

-- End of Report --

Doc No.: ITC-TTW0902.02E – Rev.17